

PRESSURE ABS

Chemical Resistance Guide



FIRST EDITION

ABS CHEMICAL RESISTANCE GUIDE

Thermoplastics:
Acrylonitrile Butadiene Styrene (ABS)
for Pressure Applications



IPEX
by aliaxis


Chemical Resistance Guide

Acrylonitrile Butadiene Styrene (ABS)
for Pressure Applications

1st Edition

© 2019 by IPEX. All rights reserved. No part of this book may be used or reproduced in any manner whatsoever without prior written permission. For information contact: IPEX, Marketing, 1425 North Service Rd E., Unit 3, Oakville, Ontario, Canada, L6H 1A7.

The information contained here within is based on current information and product design at the time of publication and is subject to change without notification. IPEX does not guarantee or warranty the accuracy, suitability for particular applications, or results to be obtained therefrom.

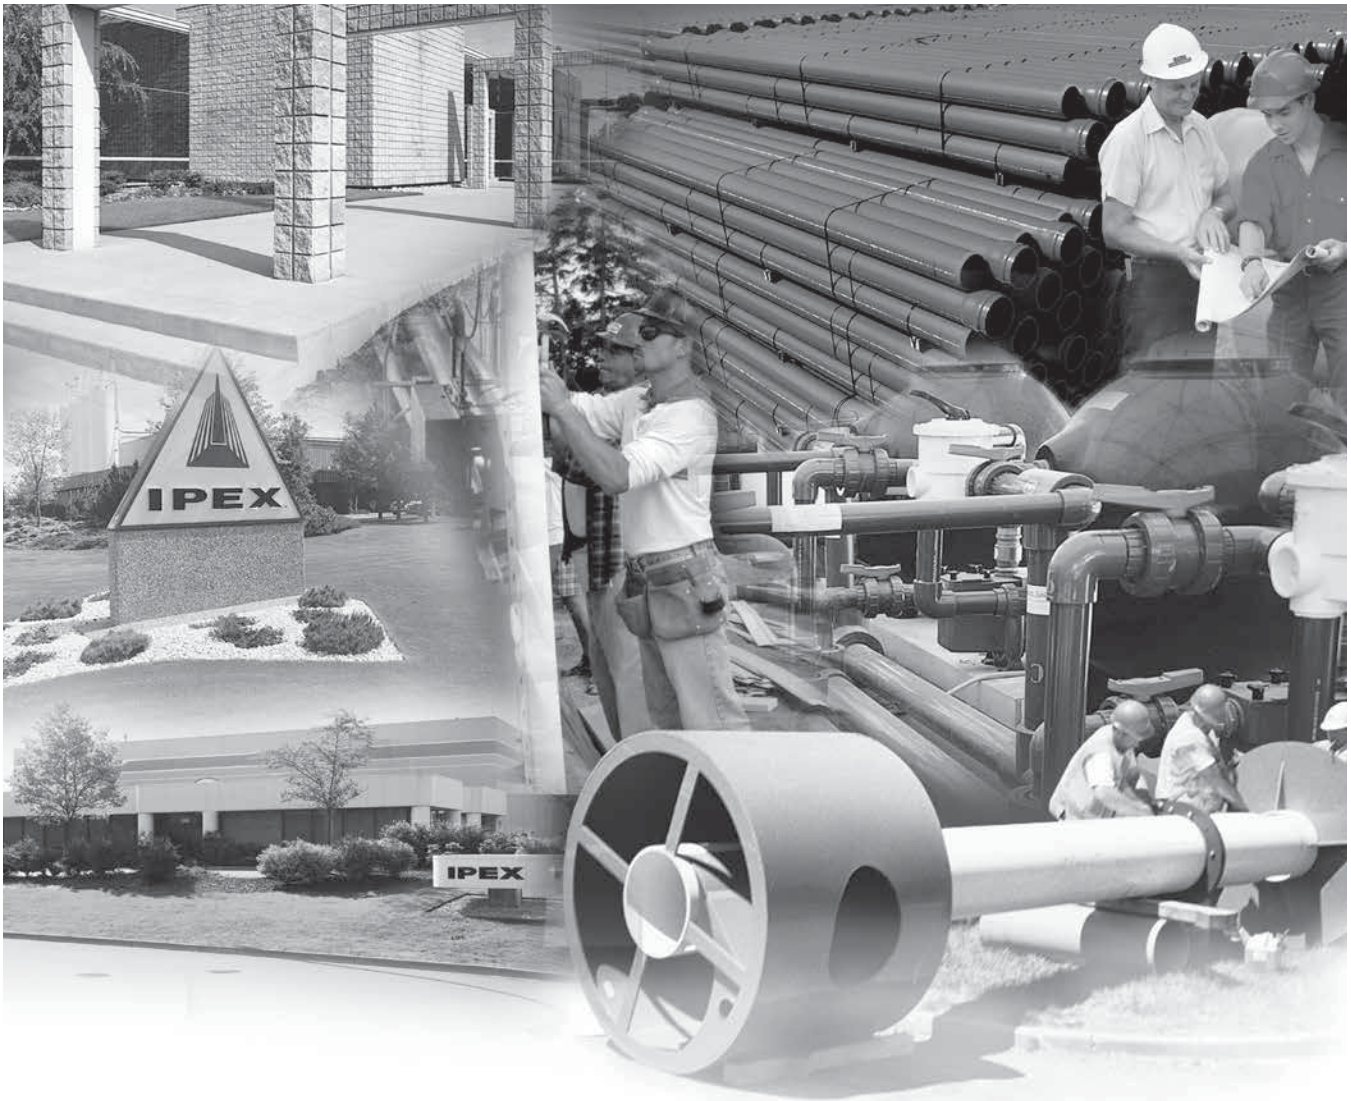

ABOUT IPEX

At IPEX, we have been manufacturing non-metallic pipe and fittings since 1951. We formulate our own compounds and maintain strict quality control during production. Our products are made available for customers thanks to a network of regional stocking locations throughout North America. We offer a wide variety of systems including complete lines of piping, fittings, valves and custom-fabricated items.

More importantly, we are committed to meeting our customers' needs. As a leader in the plastic piping industry, IPEX continually develops new products, modernizes manufacturing facilities and acquires innovative process technology. In addition, our staff take pride in their work, making available to customers their extensive thermoplastic knowledge and field experience. IPEX personnel are committed to improving the safety, reliability and performance of thermoplastic materials. We are involved in several standards committees and are members of and/or comply with the organizations listed on this page.

For specific details about any IPEX product, contact our customer service department.

INTRODUCTION

Thermoplastics and elastomers have outstanding resistance to a wide range of chemical reagents. The chemical resistance of plastic piping is basically a function of the thermoplastic material and the compounding components. In general, the less compounding components used the better the chemical resistance. Thermoplastic pipes with significant filler percentages may be susceptible to chemical attack where an unfilled material may be affected to a lesser degree or not at all.

Some newer piping products utilize a multi-layered (composite) construction, where both thermoplastic and non-thermoplastic materials are used for the layers. Layered composite material pipe may have chemical resistance that differs from the chemical resistance of the individual material. Such resistance however, is a function both of temperatures and concentration, and there are many reagents which can be handled for limited temperature ranges and concentrations. In borderline cases, it will be found that there is limited attack, generally resulting in some swelling due to absorption. There are also many cases where some attack will occur under specific conditions, but for many such applications, the use of plastic will be justified on economic grounds when considered against alternative materials. Resistance is often affected (and frequently reduced) when handling a number of chemicals or compounds containing impurities. For this reason, when specific applications are being considered, it may be worthwhile to carry out tests using the actual product that will be encountered in service. The listing that follows does not address chemical combinations.

The information is based on immersion tests on unstressed coupons, experiments and, when available, actual process experience as well as data from tests inclusive of stress from temperature and pressure. The end user should be aware of the fact that actual service conditions will affect the chemical resistance.

Chemicals that do not normally affect the properties of an unstressed thermoplastic may cause completely different behavior (such as stress cracking) when under thermal or mechanical stress (such as constant internal pressure or frequent thermal or mechanical stress cycles). Chemical resistance data from immersion tests cannot be unconditionally applied to thermoplastic piping components subjected to continuous or frequent mechanical or thermal stresses.

When the pipe will be subject to a continuous applied mechanical or thermal stress, or to combinations of chemicals, testing that duplicates the expected field conditions, as closely as possible, should be performed on representative samples of the pipe product to properly evaluate plastic pipe for use in this application.

RATINGS

Ratings are according to the product and suppliers.

The absence of any class indication for any given materials, signifies the absence of data for such material(s) with respect to the specific chemical(s), temperature(s) and concentration(s).

NOTE: Chemical resistance data is found in a laboratory setting and cannot account for all possible variables of an installed application. It is up to the design engineer or final user to use this information as guidance for a specific application design.

If a material is chemically resistant to the concentrated form of a specific chemical, it should be resistant to the diluted form of that same chemical.

All Chemical Resistance data for Acrylonitrile Butadiene Styrene (ABS) contained within this manual has been provided, with written consent, by Durapipe.

This page intentionally
left blank

ACRYLONITRILE BUTADIENE STYRENE (ABS) FOR PRESSURE APPLICATIONS

All Chemical Resistance data for Acrylonitrile Butadiene Styrene (ABS) contained within this manual has been provided, with written consent, by Durapipe.

Material

- ABS Acrylonitrile Butadiene Styrene
- Cell Classification 43232

Chemical Resistance and Performance Data

- Moderately strong mineral acids
- Caustic and ammoniacal solutions
- Most inorganic salt solutions
- Some detergents
- Temperature range: -40°F to 140°F (-40°C to +60°C)

Typical Applications

- Chilled water, low temperature brine, potable water, air conditioning, process water, foodstuffs, slurries, secondary loop refrigeration

Unsuitable for Following Uses

- Pressure applications over 140°F (60°C), strong bleaches aromatic solvents

* NOTE: Temperatures given are for guidance only; please check before specifying

Thermoplastic Pipe – Guidance for Correct Usage: Chemical resistance is affected by the following factors:

- temperature
- fluid concentration
- aeration
- flow velocity
- turbulence
- duration of exposure
- pressure

Fire

The use of thermoplastic material to convey flammable substances may be unacceptable due to fire hazard.

Foodstuffs

A resistant classification does not imply absolute suitability (e.g. certain foodstuffs may require gaskets to meet organoleptic requirements).

Thread Sealants

Some adhesive thread sealants can chemically attack some plastics and must not be used.

Please refer to Volume IV: Duraplus ABS Industrial Piping System Technical Manual for further details.

Label Adhesive

It is possible that label adhesives will contain stress cracking agents.

We recommend that other methods are used to mark pipe or that adequate checks are made to ensure suitability.

ACRYLONITRILE BUTADIENE STYRENE (ABS) CHEMICAL RESISTANCE DATA

Chemical	Concentration	(°F)	(°C)
A			
Acetaldehyde	100%	–	–
Acetaldehyde	40% Aq. Solution	–	–
Acetamide	5% Aq. Solution	104	40
Acetic acid	10% Aq. Solution	68	20
Acetic acid	30% Aq. Solution	–	–
Acetic acid	60% Aq. Solution	–	–
Acetic acid	80% Aq. Solution	–	–
Acetic acid	100% (Glacial)	–	–
Acetic anhydride	100%	–	–
Acetone	5% Aqueous Solution	–	–
Acetone	100%	–	–
Acetophenone	100%	–	–
Aluminium chloride	Saturated Aqueous	140	60
Aluminium chlorohydrate	Saturated Aqueous	140	60
Aluminium fluoride	Saturated Aqueous or Suspension	140	60
Aluminium hydroxide	Aqueous Suspension	140	60
Aluminium nitrate	Saturated Aqueous	140	60
Aluminium sulphate	Saturated Aqueous	140	60
Ammonium hydroxide	Sp. Gr = 0.88 (Approx 32% Solution)	140	60
Ammonium hydroxide	3% Solution	140	60
Ammonium bifluoride	Saturated Aqueous	–	–
Ammonium carbonate	Saturated Aqueous	104	40
Ammonium chloride	Saturated Aqueous	140	60
Ammonium fluoride	Saturated Aqueous	104	40
Ammonium nitrate	Saturated Aqueous	140	60
Ammonium persulphate	Saturated Aqueous	140	60
Ammonium phosphate(s)	Saturated Aqueous	140	60
Ammonium sulphate	Saturated Aqueous	140	60
Aqua Regia	1 Part Conc Nitric + 3 Parts Conc Hydrochloric Acid	–	–
Automotive oils	100%	A	A
B			
Benzalkonium chloride solution	Up To 50% Aqueous	–	–
Black liquor		–	–
Brine	Typically Up To 5% Salinity	140	60
Bromine water	Saturated Aqueous	–	–
Bromine water	Up To 20ppm Aqueous Solution (Sterilization Levels)	68	20

xx: Max recommended temperature

– Unsuitable / Insufficient Data

A: Applicable in some cases, consult IPEX

ACRYLONITRILE BUTADIENE STYRENE (ABS) CHEMICAL RESISTANCE DATA

Chemical	Concentration	(°F)	(°C)
C			
Calcium carbonate	Saturated Aqueous or Suspension	140	60
Calcium chloride	Saturated Aqueous	140	60
Calcium hydroxide	Saturated Aqueous or Suspension	140	60
Calcium nitrate	Saturated Aqueous	140	60
Calcium oxide	Powder	140	60
Calcium sulphate	Saturated Aqueous	140	60
Castor oil	100%	–	–
Caustic soda (see sodium hydroxide)			
Chlorine in water	Saturated (pH Neutral)	–	–
Chlorine dioxide	Saturated Aqueous Solution	–	–
Chlorine dioxide	Trace Levels For Sterilization	68	20
Chromic acid	40%	–	–
Compressor oils	100%	A	A
Corn oil	100%	–	–
Cottonseed oil	100%	–	–
Cresol	Up To 5% Aqueous Solution	–	–
Cyclohexane	100%	–	–
Cyclohexanol	100%	–	–
Cyclohexanone	100%	–	–
D			
Di-n-butyl phthalate	100%	–	–
Di-n-butyl sebacate	100%	–	–
Diesel (petro-diesel)	100%	–	–
Diethanolamine	100% or Aqueous Solution	–	–
Dimethylformamide		–	–
Di-octyl phthalate	100%	–	–
E			
Essential oils (contain terpenoid compounds)		–	–
Ethanolamine	100%	–	–
Ethyl alcohol (ethanol)	100% or Aqueous Solution	–	–
Ethylene glycol	100% or Aqueous Solution	140	60
F			
Ferric chloride	Saturated Aqueous	104	40
Ferric hydroxide	Saturated Aqueous	140	60
Ferric nitrate	Saturated Aqueous	140	60
Ferric sulphate	Saturated Aqueous	140	60
Ferrous chloride	Saturated Aqueous	140	60
Ferrous hydroxide	Saturated Aqueous	140	60
Ferrous nitrate	Saturated Aqueous	140	60
Ferrous sulphate	Saturated Aqueous	140	60

xx: Max recommended temperature

– Unsuitable / Insufficient Data

A: Applicable in some cases, consult IPEX

ACRYLONITRILE BUTADIENE STYRENE (ABS) CHEMICAL RESISTANCE DATA

Chemical	Concentration	(°F)	(°C)
Fluosilicic acid	35%	–	–
Formic acid	85 – 90%	–	–
Formic acid	50%	–	–
Formic acid	3%	140	60
Fructose	Saturated Aqueous	140	60
G			
Gasoline (spirit-based fuel)	100%	–	–
Glucose	Saturated Aqueous	140	60
Glycerine	Saturated Aqueous	140	60
Glycol ethers (cellosolves and carbitols)	100% And Aqueous Solutions	–	–
Glyoxal	40% Aqueous Solution	–	–
Green liquor		104	40
Gypsum (see calcium sulphate)			
H			
Hydrochloric acid	10% Aqueous Solution	104	40
Hydrochloric acid	25% Aqueous Solution	68	20
Hydrochloric acid	37% Aqueous Solution (Concentrated)	–	–
Hydrofluoric acid	10% Aqueous Solution	–	–
Hydrofluoric acid	30% Aqueous Solution	–	–
Hydrofluoric acid	70% Aqueous Solution	–	–
Hydrogen peroxide	3% Aqueous Solution (10 Volumes)	68	20
Hydrogen peroxide	30% Aqueous Solution (100 Volumes)	–	–
hypochlorites (see sodium hypochlorite)			
hypochlorous acid (see chlorine in water)			
hydroxylamine (incl. hydrochloride and sulphate)	Aqueous Solution	–	–
I			
Iodine	Up To 10% Aqueous or Mixed Solvent Solution	–	–
Isopropanol	100% or Aqueous Solution	–	–
K			
Kerosene	100%	–	–
L			
Lime (see calcium oxide)			
Linseed oil	100%	–	–
M			
	Saturated Aqueous or Suspension	140	60
Magnesium chloride	Saturated Aqueous	140	60
Magnesium hydroxide	Saturated Aqueous or Suspension	140	60
Magnesium nitrate	Saturated Aqueous	140	60
Magnesium sulphate	Saturated Aqueous	140	60
Methyl alcohol	100%	–	–
Mineral oil (refined)	100%	68	20

xx: Max recommended temperature

– Unsuitable / Insufficient Data

A: Applicable in some cases, consult IPEX

ACRYLONITRILE BUTADIENE STYRENE (ABS) CHEMICAL RESISTANCE DATA

Chemical	Concentration	(°F)	(°C)
N			
Nitric acid	10%	68	20
Nitric acid	30%	–	–
Nitric acid	60%	–	–
Nitric acid	Fuming	–	–
O			
Oil (See Automotive, Compressor, Mineral, Vegetable)			
Oleum (see sulphuric acid – fuming)			
P			
Peracetic acid	Up To 15%	–	–
Peracetic acid	Residual Traces in Aqueous Solution From Sterilization	68	20
Petrol (see Gasoline)			
Phenol	Up To 10% Aqueous Solution	–	–
Phosphoric acid	85%	–	–
Poly Aluminium Chloride (See Aluminium Chlorohydrate)			
Polyelectrolyte solutions	Manufacturers' Recommendations	A	A
Polyethylene glycol	All Concentrations and Molecular Weight Ranges	–	–
Potassium bicarbonate	Saturated Aqueous	140	60
Potassium bifluoride	Saturated Aqueous	–	–
Potassium bisulphate	Saturated Aqueous	140	60
Potassium bisulphite	Saturated Aqueous	140	60
Potassium bromate	Saturated Aqueous	140	60
Potassium bromide	Saturated Aqueous	140	60
Potassium carbonate	Saturated Aqueous	140	60
Potassium chlorate	Saturated Aqueous	140	60
Potassium chloride	Saturated Aqueous	140	60
Potassium cyanide	Saturated Aqueous	140	60
Potassium dichromate	Saturated Aqueous	140	60
Potassium ferricyanide	Saturated Aqueous	140	60
Potassium ferrocyanide	Saturated Aqueous	140	60
Potassium fluoride	Saturated Aqueous	140	60
Potassium formate (alkaline solution)	Up To 50%	104	40
Potassium hydroxide	≤ 50%	68	20
Potassium iodate	Saturated Aqueous	140	60
Potassium iodide	Saturated Aqueous	140	60
Potassium nitrate	Saturated Aqueous	140	60
Potassium permanganate	Saturated Aqueous	–	–
Potassium persulphate	Saturated Aqueous	68	20
Potassium sulphate	Saturated Aqueous	140	60
Potassium sulphite	Saturated Aqueous	140	60
Potassium tetraborate	Saturated Aqueous	140	60
Potassium thiosulphate	Saturated Aqueous	140	60
Propylene glycol	100% or Aqueous Solution	140	60

xx: Max recommended temperature

– Unsuitable / Insufficient Data

A: Applicable in some cases, consult IPEX

ACRYLONITRILE BUTADIENE STYRENE (ABS) CHEMICAL RESISTANCE DATA

Chemical	Concentration	(°F)	(°C)
Q			
Quaternary Ammonium Compounds (See Benzalkonium Chloride)			
S			
Sodium bicarbonate	Saturated Aqueous	140	60
Sodium bisulphate	Saturated Aqueous	140	60
Sodium bisulphite	Saturated Aqueous	140	60
Sodium bromate	Saturated Aqueous	140	60
Sodium bromide	Saturated Aqueous	140	60
Sodium carbonate	Saturated Aqueous	140	60
Sodium chlorate	Saturated Aqueous	140	60
Sodium chloride	Saturated Aqueous	140	60
Sodium chlorite	2% Aqueous Solution	68	20
Sodium chlorite	25% Aqueous Solution	–	–
Sodium cyanide	Saturated Aqueous	140	60
Sodium dichromate	Saturated Aqueous	140	60
Sodium ferricyanide	Saturated Aqueous	140	60
Sodium ferrocyanide	Saturated Aqueous	140	60
Sodium fluoride	Saturated Aqueous	140	60
Sodium hydroxide	≤ 50%	104	40
Sodium hydroxide	> 30%	104	40
Sodium hypochlorite	≤ 0.5% Aqueous (Alkaline) Solution	68	20
Sodium hypochlorite	≤ 5% Aqueous (Alkaline) Solution	–	–
Sodium hypochlorite	5 – 15% Aqueous (Alkaline) Solution	–	–
Sodium iodate	Saturated Aqueous	140	60
Sodium iodide	Saturated Aqueous	140	60
Sodium metabisulphite	Saturated Aqueous	140	60
Sodium methylate	30% Solution In Methanol	–	–
Sodium nitrate	Saturated Aqueous	140	60
Sodium nitrite	Saturated Aqueous	140	60
Sodium phosphate(s)	Saturated Aqueous	140	60
Sodium silicate	Saturated Aqueous	140	60
Sodium sulphate	Saturated Aqueous	140	60
Sodium sulphite	Saturated Aqueous	140	60
Sodium tetraborate	Saturated Aqueous	140	60
Sodium thiosulphate	Saturated Aqueous	140	60
Starch	Saturated Aqueous	140	60
Sulphamic acid	Saturated Aqueous	140	60
Sulphuric acid	≤10%	140	60
Sulphuric acid	10 – 30%	140	60
Sulphuric acid	30 – 50%	68	20
Sulphuric acid	50 – 70%	–	–
Sulphuric acid	70 – 85%	–	–
Sulphuric acid	95 – 96%	–	–
Sulphuric acid	98%	–	–
Sulphuric acid – fuming		–	–

xx: Max recommended temperature

– Unsuitable / Insufficient Data

A: Applicable in some cases, consult IPEX

ACRYLONITRILE BUTADIENE STYRENE (ABS) CHEMICAL RESISTANCE DATA

Chemical	Concentration	(°F)	(°C)
T			
Tartaric acid	Saturated Aqueous	140	60
Terpenes	100%	–	–
Tetramethylammonium hydroxide	25% Aqueous	–	–
Toluene	100%	–	–
Trichloroisocyanuric acid	Saturated Aqueous	–	–
Turpentine (oil)	100%	–	–
U			
urea	35% Solution	140	60
V			
Vegetable oils (does not include essential oils)	100%	–	–
W			
Water, industrial waste	100%	A	A
Water, potable (drinking)	100%	140	60
Water, saline (sea water)	100%	140	60
Water, ultrapure	100%	140	60
Water for injection	100%	140	60
Water, water (from sewage processing)	100%	140	60
White liquor		104	40
White spirit (aka Stoddard solvent)	100%	–	–
X			
Xylene	100%	–	–
Z			
Zinc chloride	Saturated Aqueous	140	60
Zinc nitrate	Saturated Aqueous	140	60
Zinc sulphate	Saturated Aqueous	140	60

xx: Max recommended temperature

– Unsuitable / Insufficient Data

A: Applicable in some cases, consult IPEX

NOTES

SALES AND CUSTOMER SERVICE

IPEX Inc.

Toll Free: (866) 473-9462

ipexna.com

About the IPEX Group of Companies

As leading suppliers of thermoplastic piping systems, the IPEX Group of Companies provides our customers with some of the largest and most comprehensive product lines. All IPEX products are backed by more than 50 years of experience. With state-of-the-art manufacturing facilities and distribution centers across North America, we have established a reputation for product innovation, quality, end-user focus and performance.

Markets served by IPEX group products are:

- Electrical systems
- Telecommunications and utility piping systems
- PVC, PVCO, CPVC, PP, ABS, PEX, FR-PVDF and PE pipe and fittings (1/4" to 48")
- Industrial process piping systems
- Municipal pressure and gravity piping systems
- Plumbing and mechanical piping systems
- PE Electrofusion systems for gas and water
- Industrial, plumbing and electrical cements
- Irrigation systems



This literature is published in good faith and is believed to be reliable. However it does not represent and/or warrant in any manner the information and suggestions contained in this brochure. Data presented is the result of laboratory tests and field experience.

A policy of ongoing product improvement is maintained. This may result in modifications of features and/or specifications without notice.

