


Endura® InLine Drain Strainer

Installed on individual sink wastes in kitchen and sanitary applications, the Endura® InLine Drain Strainer (IDS) prevents food debris, hair, lint and similar solid material from entering the drainage system, causing restriction and blockage.

Manufactured in both ABS and PVC, the Endura® IDS is based on the proven design of a drum trap, offering complete flexibility of installation either horizontal or vertical, the outlet being able to be set anywhere in a 360° range.

The filter screen, assembled as an integral part of the access cap, has 10 times the open area of the inlet and outlet connections extending the interval of cleaning and providing easy, non-contact removal of captured debris. Simply unscrew, withdraw, tap and replace.

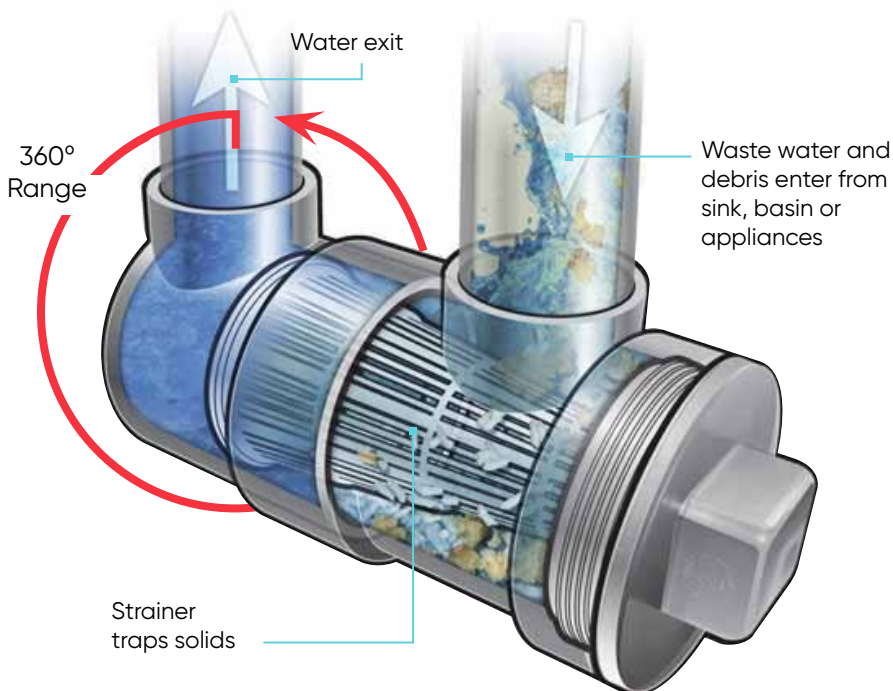

Features and Benefits:

- Manages debris and safeguards against the loss of valuable items
- Manufactured in both ABS & PVC
- Flexibility of installation
- Filter screen has 10 times the open area of the inlet and outlet connections
- Easy removal of debris

Applications:

- Domestic & Commercial Kitchens
- Hair & Beauty Salons
- Barber Shops
- Pet Grooming Parlors
- Healthcare Facilities
- Dormitories/Motels

Standards:



IGC-225-06




Contact us

Visit our website: [ipexna.com / enduragreaseandmanagement.com](http://ipexna.com/enduragreaseandmanagement.com)

Eastern U.S. Toll free: (800) 463-9572


Western U.S. Toll free: (888) 461-5307

Endura® is a registered trademark.



Fitted in conjunction with or in place of a P-trap, the Endura IDS can be used in applications where space is at a premium, providing ease of access to the end user. As a development of a specialty plumbing fitting, dimensionally the Endura IDS is manufactured in accordance with the performance and dimensional requirements of North American plumbing systems.

Dimensions



Dim.	# 393243A (ABS)	# 393243AW (PVC)
A	1.5" Nominal Diameter	1.5" Nominal Diameter
B	9.1"	9.1"
C	4.9"	4.9"
D	4.3"	4.3"
E	3.9"	3.9"



Typical Installations

Unlike competitive products the body of the Endura IDS is supplied 'loose-assembled'. This means that when it comes to installation the installer retains the full benefit of being able to orientate the outlet to suit the installation, only solvent welding the main joint when the location and orientation have

been confirmed. Be it a domestic or commercial application these four images show typical IDS installations.

Installation Awareness

Regardless of the application, when installing the Endura IDS, at least 8" of clearance must remain in the direction of strainer removal. This will allow sufficient space for a catch container to collect any water or debris held in the unit, depending on its orientation.

