


ENDURA® GREASE MANAGEMENT

endura®
Grease Interceptor



*The
Engineered
Solution
to grease
management*

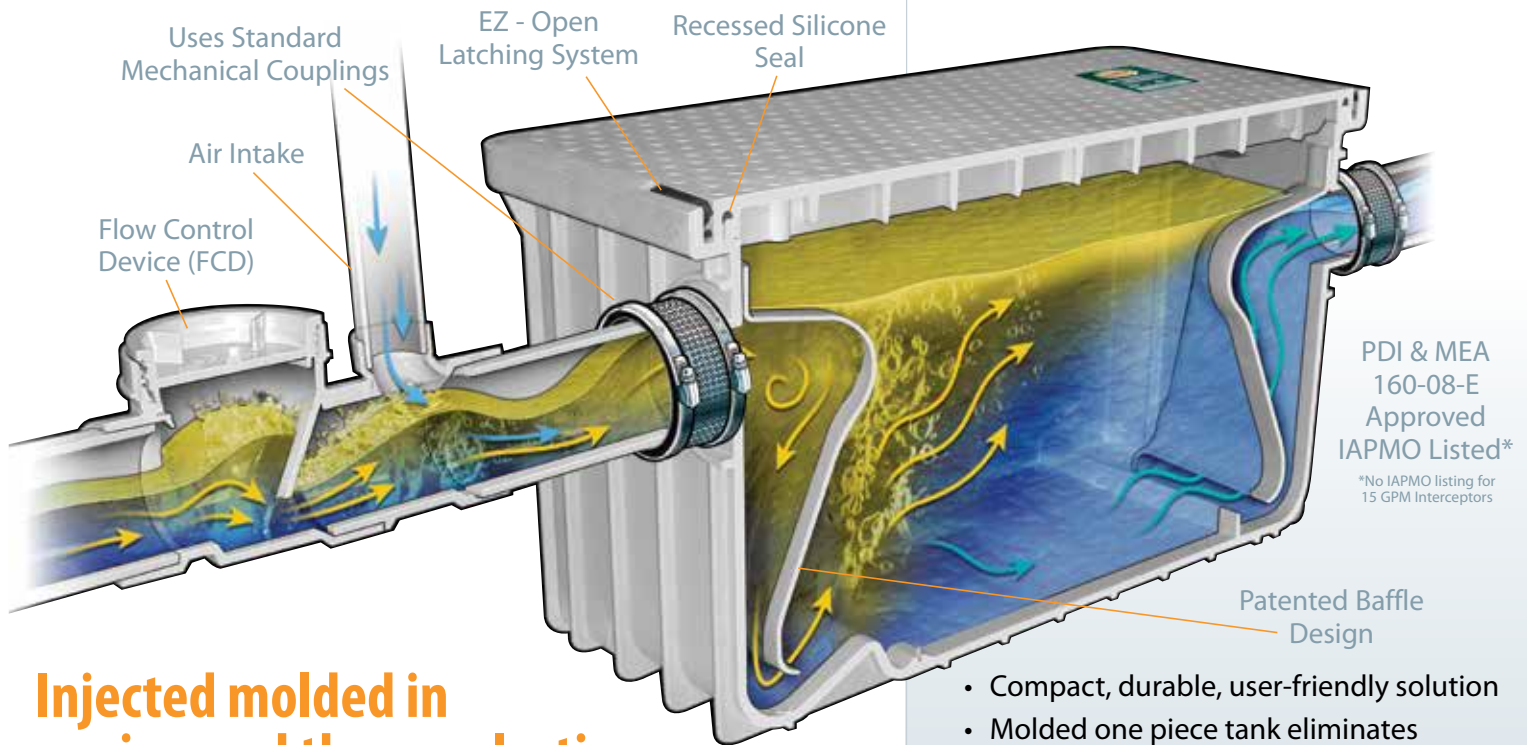

Injected molded in engineered thermoplastics, Endura® will not corrode, chip or peel, even under the most severe applications

WARRANTED
10
YEARS

Sewer authorities and building owners spend millions of dollars every year combating grease accumulation in plumbing systems. Grease accumulation causes sewer blockages and overflows. These overflows are a health risk to you, your employees, your customers and the general public. Injection molded in engineered thermoplastic, the Endura® Grease Interceptor provides restaurant operators the best value and performance on the market today.


- Compact, durable, user-friendly solution
- Molded one piece tank eliminates seams and potential leaking
- Can withstand continuous discharge at 104° C (220° F)
- Lightweight and strong, Endura® models weigh up to 60% less than directly equivalent metal competitors - offers ease of installation, transport and storage
- Endura® supports 300 pounds of pedestrian and light duty traffic
- Connected using mechanical joint couplings allowing for use of various piping materials
- Flexibility of installation - can be installed in-floor, on-floor, or semi-recessed
- 15-50 gpm modular risers available

www.EnduraGreaseManagement.com



TANK DIMENSIONS

7-50 GPM

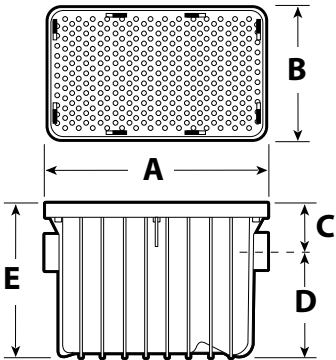

	Endura 7	Endura 10	Endura 15	Endura 20	Endura 25LO	Endura 25		Endura 35	Endura 50
GPM/lbs	7/14	10/20	15/30	20/40	25/50 LO	25/50		35/70	50/100
						2" Model	3" Model		
A	14.5" (368mm)	14.5" (368mm)	23.6" (600mm)	23.6" (600mm)	31.0" (787mm)	31.25" (794mm)		31.0" (787mm)	31.0" (787mm)
B	17.5" (444mm)	17.5" (444mm)	17.5" (444mm)	17.5" (444mm)	23.5" (597mm)	18.5" (470mm)		23.5" (597mm)	23.5" (597mm)
C	3.5" (89mm)	3.5" (89mm)	3.5" (89mm)	3.5" (89mm)	4" (102mm)	4" (102mm)	4.5" (114mm)	5.0" (127mm)	5.0" (127mm)
D	12.8" (325mm)	12.8" (325mm)	12.8" (325mm)	12.8" (325mm)	7" (178mm)	12.5" (318mm)	12" (305mm)	12.5" (318mm)	18.5" (470mm)
E	16.3" (414mm)	16.3" (414mm)	16.3" (414mm)	16.3" (414mm)	11" (279mm)	16.5" (419mm)		17.5" (444mm)	23.5" (597mm)


FLOW CONTROL DIMENSIONS

NOM. Pipe Size	1 Piece Compact 2" h x h	2 Piece 2" h x h	2 Piece 3" h x h	2 Piece 4" h x h
A	3.94" (100mm)	3" (76.2mm)	4.23" (107.4mm)	6.13" (155.7mm)
B	3.44" (87.4mm)	3.84" (97.5mm)	5.93" (151mm)	6.84" (173.7mm)
C	-	-	-	-


AIR INTAKE DIMENSIONS

2" spg x h	3" spg x h	4" spg x h
2.91" (73.9mm)	2.67" (67.8mm)	3.19" (81mm)
2.71" (68.8mm)	4.01" (101.9mm)	5.04" (128mm)
2.24" (56mm)	2.27" (57.7mm)	2.72" (69.1mm)

1 Piece Compact Flow Control (2" Version Illustrated)



2 Piece Flow Control (3" Version Illustrated)



A 2", two piece flow control is also available for purchase.

See U39 Pricelist for details

CAPACITIES

	Endura 7	Endura 10	Endura 15	Endura 20	Endura 25LO	Endura 25	Endura 35	Endura 50
Part Number	3907A02	3910A02	3915A02	3920A02	3925A02LO	3925XTA02 (2") 3925XTA03 (3")	3935A03 (3") 3935A04 (4")	3950A03 (3") 3950A04 (4")
US Gallons Per Minute - GPM (L/Sec)	7 (0.44)	10 (0.63)	15 (0.94)	20 (1.26)	25 LO (1.6)	25 (1.6)	35 (2.2)	50 (3.2)
Min. Grease Capacity - lb (kg)	14 (6.35)	20 (9.07)	30 (13.6)	40 (18.1)	50 (22.68)	50 (22.68)	70 (31.8)	100 (45.4)
Grease Capacity Actual (ASME A112.14.3) - lb (kg) † NSF ES 15741	31.95 (14.49)	38.07 (17.28)	35.14 (15.94)	76.4 (34.65)	62.59 (28.39)	72.55 (32.90) (2") 73.01 (33.11) (3")	138.5 (62.8)	122.07 (55.3)*
Average Efficiency % (ASME A112.14.3)	95.5%	92.5%	90.1%	95.4%	96.3%	96.7% (2") 97.3% (3")	98.6%	93.9%
Operating Temperature Capabilities	220°F (104°C)	220°F (104°C)	220°F (104°C)	220°F (104°C)	220°F (104°C)	220°F (104°C)	220°F (104°C)	220°F (104°C)
Cover Load Rating - CSA B481.0	L 300 lb (135 kg)	L 300 lb (135 kg)	L 300 lb (135 kg)	L 300 lb (135 kg)	L 300 lb (135 kg)	L 300 lb (135 kg)	L 300 lb (135 kg)	L 300 lb (135 kg)
CSA B481.0 Min. Test Load for Approval	L 600 lb (270 kg)	L 600 lb (270 kg)	L 600 lb (270 kg)	L 600 lb (270 kg)	L 600 lb (270 kg)	L 600 lb (270 kg)	L 600 lb (270 kg)	L 600 lb (270 kg)
Unit Weight (Empty)	15.8 lb (7.17 kg)	15.8 lb (7.17 kg)	23 lb (10.4 kg)	23 lb (10.4 kg)	34.35 lb (15.58 kg)	35.61 lb (16.153 kg) (2") 37.77 lb (17.136 kg) (3")	45 lb (20.4 kg)	60 lb (27.2 kg)
Liquid Capacity	12.96 gal (49.06 L)	12.96 gal (49.06 L)	21.6 gal (81.8 L)	21.6 gal (81.8 L)	18.9 gal (71.54 L)	30.6 gal (115.83 L) (2") 29.5 gal (111.67 L) (3")	39.4 gal (149.1 L)	52.0 gal (197 L)
Connection size (mechanical joint only)	2"	2"	2"	2"	2"	2" (3925XTA02) 3" (3925XTA03)	3" (3935A03) 4" (3935A04)	3" (3950A03) 4" (3950A04)

* Not evaluated to breakdown capacity (PDI-G101)

Grease Capacity Min - lb (kg): Industry minimum grease capacity based on GPM flow rate. Requires minimum 2 lb of grease capacity for each GPM of flow.

Grease Capacity Actual - lb (kg): Actual capacity at breakdown when tested to ASME A112.14.3 / NSF ES 15741 as indicated.



ASME
A112.14.3



Technical Support
tech-support@endurainterceptor.com



IPEX
Committed to Excellence

Eastern U.S. Customers
Tel: (289) 881-0120
Toll Free: 1-800-463-9572
Fax: (905) 844-0826

Western U.S. Customers
Tel: (303) 373-1918
Toll Free: 1-888-461-5307
Fax: (303) 373-1923

www.ipexna.com | sales@ipexamerica.com